
IOW 238 K1/N1/D1Pump

Magnaline



Data sheet



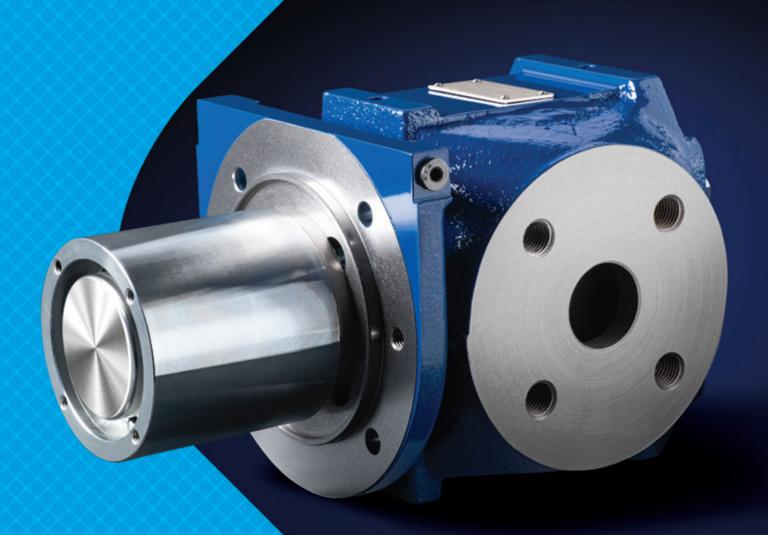

IOW 238 K1/N1/D1 Pump






- Max differential pressure 16 Bar (232 psi)
- Pump connected to electric motor using a magnetic coupling, meaning there is no mechanical contact between pump and motor, and pumped liquid is fully enclosed within the pump.
- Pressure relief valve installed internally to protect the pump
- 3 different strengths of magnetic coupling available, depending on the viscosity of liquid to be pumped
- Connections for steam tracing to heat the pumped liquid up and reduce viscosity



- 3 rotor leads available, depending on performance required
- Fluid viscosity: 1.4—1500 cSt.
- Fluid temperature: -20 to +180°C (-4 to +356°F)
- Max RPM: 3600

US Gallons per minute

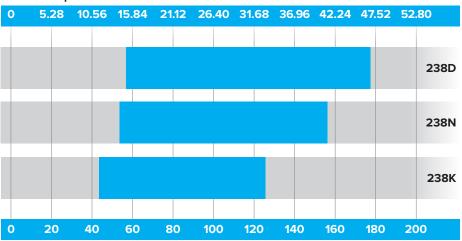

Litres per minute

Coupling

В

C

									52.80
									238D
									238N
									238k
20	40	60	80	100	120	140	160	180	200
	20	20 40	20 40 60	20 40 60 80	20 40 60 80 100	20 40 60 80 100 120	20 40 60 80 100 120 140	20 40 60 80 100 120 140 160	20 40 60 80 100 120 140 160 180

Ad	van	tages	


- Designed to endure a long, problem free operation
 - Self lubricating
 - Can be used for a number of different liquids
 - Can be approved to a number of classification societies
 - Pumped liquid is fully enclosed
 - Same day dispatch on spares
 - **Environmentally friendly**
 - Use of an angle bracket aids mounting
 - Can be mounted horizontally or vertically

238D RPM LPM 1470 57.6 15.2 1.3 1770 74.8 19.8 1.6 2950 143.9 38.0 3.4 176.9 46.7 4.3 238N 1470 54 14.3 1.2 1770 69 18.2 1.5 127.2 33.6 3.2 157 41.5 4.1 238K LPM RPM GPM 44.3 1470 1.3 1770 571 1.6 15.1 101.6 26.8 3.4 2950 3550 124.8 33.0 4.3

NOTE: RPM = Rev per minute LPM = Litres per minute, GPM = US Gallons per minute, kW = Kilowatts

Applications

- Supplying fuel and lubrication to diesel engines
- Transferring oil in refineries, tank farms and on board ships
- Used by big machines, hydraulic systems and transformer oils
- Used for lubrication of gears, hydro turbines, turbines powered by steam or gas and paper machines



N_m

14

22

30

lb ft

10

16

22



visit IOWGroup.com

